

10/26/00
jc806 U.S. PTO

10-30-00

A

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

CERTIFICATE OF EXPRESS MAILING

I hereby certify that this paper and the documents and/or fees referred to as attached therein are being deposited with the United States Postal Service on October 26, 2000 in an envelope as "Express Mail Post Office to Addressee" service under 37 CFR §1.10, Mailing Label Number **EL560312551US**, addressed to the Assistant Commissioner for Patents, Washington, DC 20231.

Dionna Holmes
Dionna Holmes

Attorney Docket No.: NEV1P002

First Named Inventor: Hensen Mou

PR/98/91
801669/60
U.S. PTO
10/26/00

UTILITY PATENT APPLICATION TRANSMITTAL (37 CFR. § 1.53(b))
(Regular application claiming priority of a provisional)

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

Sir: This is a request for filing a patent application under 37 CFR. § 1.53(b) in the name of inventors:
Hensen Mou

For: **INTERACTIVE DATA TRANSMISSION SYSTEM HAVING STAGED SERVERS**

Priority of U.S. Provisional Application No. 60/216,797 filed on July 7, 2000 is claimed under 35 U.S.C. § 119(e).

Application Elements:

- ☒ **49** Pages of Specification, Claims and Abstract
- ☒ **14** Sheets of informal Drawings
- ☒ **2** Combined Declaration and Power of Attorney
- ☐ Separate Declaration

Accompanying Application Parts:

- ☒ Assignment and Assignment Recordation Cover Sheet (recording fee of \$40.00 enclosed)
- ☐ Separate Power of Attorney by Assignee
- ☐ 37 CFR 3.73(b) Statement by Assignee
- ☐ Information Disclosure Statement with Form PTO-1449
- ☐ Copies of IDS Citations
- ☐ Preliminary Amendment
- ☒ Return Receipt Postcard
- ☒ Small Entity Statement(s)

☐ Other:

Claim For Foreign Priority

☐ Priority of Application No. filed on
is claimed under 35 U.S.C. § 119.

☐ The certified copy is enclosed.

☐ The certified copy will follow.

☐ Amend the specification by inserting before the first line the sentence:

“This application claims the benefit of U.S. Provisional Application No.
filed on , the disclosure of which is incorporated herein by reference.”

Fee Calculation (37 CFR § 1.16)

	(Col. 1) Total Claims		(Col. 2) Claims	(Col. 3) Present Extra	Rate	Additional Fee
TOTAL	50	MINUS	20	= 30	x 9	270.00
INDEP.	15	MINUS	3	= 12	x 40	480.00
[] First presentation of multiple dependent claim					\$135	0
Basic Filing Fee under 37 C.F.R. §1.16(a)					\$355	355.00
TOTAL						1,105.00

☒ Check No. ~~3354~~ in the amount of \$1,145.00 is enclosed.

☒ The Commissioner is authorized to charge any fees beyond the amount enclosed which may be required, or to credit any overpayment, to Deposit Account No. 500388 (Order No. NEV1P002).

General Authorization for Petition for Extension of Time (37 CFR §1.136)

☒ Applicants hereby make and generally authorize any Petitions for Extensions of Time as may be needed for any subsequent filings. The Commissioner is also authorized to charge any extension fees under 37 CFR §1.17 as may be needed to Deposit Account No. 500388 (Order No. NEV1P002).

☒ Please send correspondence to the following address:

Customer Number 022434
BEYER WEAVER & THOMAS, LLP
P.O. Box 778
Berkeley, CA 94704-0778
Telephone (650) 961-8300
Fax (650) 961-8301



Date: _____

Elise R. Heilbrunn
Registration No. **42,649**

022434

Applicant/Patentee: Hensen Mou
Application or Patent No. Not yet assigned Atty Docket # NEV1P002
Filed or Issued: _____

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS
37 CFR 1.9(f) and 1.27(c)--SMALL BUSINESS CONCERN

I hereby declare that I am
☐ the owner of the small business concern identified below:
☒ an official empowered to act on behalf of the small business concern identified below:

NAME OF CONCERN: Nevco Technology, Inc.
ADDRESS: 570 S. Hillview Dr., Milpitas, California 95035

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 CFR 121.3-18, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees under 41(a) and (b) of Title 35, U.S. Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention entitled: Interactive Data Transmission System Having Staged Servers, by inventor Hensen Mou, described in

☒ the specification filed herewith.
☐ Application No. _____ filed _____
☐ patent # _____ issued _____

If the rights held by the above-identified small business concern are not exclusive, each individual, concern or organization having rights to the invention is listed below* and no rights to the invention are held by any person, other than the inventor, who could not qualify as a small business concern under 37 CFR 1.9(d) or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

*Note: separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

Name: _____
Address: _____
☐ individual ☒ small business concern ☐ nonprofit organization

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b)).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 1001 of Title 18 of the U.S. Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING: Hensen Mou
TITLE IN ORGANIZATION: President
SIGNATURE Hensen Mou DATE 10/12/00

PATENT APPLICATION

INTERACTIVE DATA TRANSMISSION SYSTEM HAVING STAGED SERVERS

By Inventors:

Hensen Mou

Assignee: Nevco Technology Inc.

Entity: Small

BEYER & WEAVER, LLP
P.O. Box 61059
Palo Alto, CA 94306
Telephone (510) 843-6200

INTERACTIVE DATA TRANSMISSION SYSTEM HAVING STAGED SERVERS

5

CROSS-REFERENCE TO RELATED APPLICATION

This application claims priority of U.S. Provisional Application No.
10 60/216,797, entitled "INTERACTIVE DATA TRANSMISSION SYSTEM,"
filed on July 7, 2000, which is hereby incorporated by reference for all
purposes.

This application is related to Docket No. NEV1P001, U.S.
Application No. _____ filed on the same day, and entitled
15 "INTERACTIVE DATA TRANSMISSION SYSTEM."

BACKGROUND OF THE INVENTION

20

1. FIELD OF THE INVENTION

The present invention relates generally to real-time data transmission
across a network. More particularly, the present invention relates to real-time
transmission of data and interactive modification of the data transmitted
25 across a network in response to a request received from a network device over
the network.

2. DESCRIPTION OF RELATED ART

A popular pasttime in today's entertainment-oriented society is watching movies. In fact, many movie fanatics have acquired elaborate home entertainment systems solely for this purpose. However, for those individuals
5 who decide to spend their Saturday night at home with a movie, there a limited number of options available to them.

Traditionally, movie goers who prefer to watch movies in the privacy of their own homes rent videos from a local video rental store. However, the video rental process is a time-consuming one, requiring the movie viewer to
10 travel from his or her home merely to obtain the desired video. Of course, even with the obvious disadvantages associated with the video rental process, many still find this desirable since they can watch the movie as many times as they want, and they may pause, rewind, fast forward, and re-start the movie at their own convenience.

15 In view of the disadvantages associated with the conventional video rental process, pay-per-view is a viable option, particularly in hotels which often do not offer video rental services to its guests. Through the pay-per-view option, it is possible to select a video as well as view the video from the privacy of home or a hotel room. However, the movie choices typically
20 offered to movie viewers by such cable providers are limited. Moreover, the pay-per-view option does not offer the advantages of a standard VCR. More particularly, the pay-per-view option does not allow a user to pause, rewind, fast forward, or re-start a movie once it has started. In addition, the available viewing times are typically set and therefore cannot be selected by a user.

Physical tapes are also used for a variety of purposes other than viewing movies. For instance, in Asian countries, karaoke is a popular pastime. A traditional karaoke business is commonly run with a central control room connected to multiple listening stations. The control room contains a machine associated with each listening station to enable a desired tape to be played and routed to the listening station (e.g., via a coaxial cable). When a karaoke participant in one of the listening stations requests a particular karaoke song, the appropriate tape is physically inserted into the machine connected to the listening station. The karaoke tape is then played and routed to the listening station connected to this machine.

The existing karaoke model is undesirable in a variety of ways. Since a machine capable of playing karaoke tapes is required for each listening station, the existing karaoke system often requires numerous machines. Since these machines are not automated, it is necessary to employ personnel that will be available to operate the machines. Due to the expense associated with acquiring and maintaining numerous karaoke machines and associated personnel, a traditional karaoke business is far from inexpensive to operate. In addition, it is typically necessary to maintain multiple copies of songs that are popularly requested in order to be able to fulfill the same song request when it is received from more than one listening station. Moreover, since multiple copies are often retained for these popular selections, the cost of maintaining an adequate inventory as well as storage space to store these copies increases the cost of such a karaoke business. In addition, the quality of a physical medium such as a video tape deteriorates over time. Moreover, since the

karaoke tapes must be loaded and unloaded by humans, this type of system is susceptible to human error. As a result, the incorrect tape may be loaded or there may be a substantial delay between songs while the personnel are locating or changing the tapes. Thus, it is impossible for a karaoke participant
5 to predict the time that a selected song will start. Similarly, it is impossible to predict the delay between songs that are loaded consecutively into the karaoke machine. It is also important to note that the karaoke singers in the listening stations do not have access do the machine associated with their private listening station. Thus, once a karaoke tape has been inserted, karaoke
10 participants cannot interactively control their individual karaoke experience.

In view of the above, it would be desirable if a system could offer the interactive nature of a VCR without the limitations and conveniences associated with a VCR. In addition, it would be beneficial if a user were provided a wide range of choices previously unavailable to a VCR or pay-per-
15 view user.

SUMMARY

5 The present invention enables data to be transmitted over a network from a server to a client device such as a set-top box. This may be accomplished via a single local server as well as via multiple staged servers, such as from a central server via the local server. For instance, the central server may be associated with a web site on the Internet. In addition, once initiated, data flow may be modified and controlled interactively by the user. Moreover, a file may be loaded from the central server to a memory associated with the local server. This loading process may be performed in combination with data transmission upon initiation by a user (e.g., via a web browser) or by the local server when a requested file is not accessible to the local server. Alternatively, it may be desirable to load a file independently from the data transmission process.

15 In accordance with one aspect of the invention, a first network device such as a set-top box may interactively control data flow from a second network device such as a server to the first network device. A control command indicating a desired modification to the flow of data from the second network device to the first network device is received at the first network device. The first network device sends a control command to the second network device. When the second network device receives the control command, the second network device modifies the flow of data from the second network device to the first network device in response to the control

command. The first network device then receives a modified flow of data from the second network device to the first network. This process may similarly be performed across multiple staged servers rather than by a single local server.

5 Modification to the flow of data may be accomplished by modifying a data stream in a variety of ways. For instance, modification may include initiating transmission of a data stream, pausing transmission of a data stream, advancing transmission by a single frame, modifying the speed of transmission of data, and modifying the source of the data being transmitted
10 (e.g., file and/or file location). Such a modification to the flow of data between network devices may be initiated by a user via an input device such as a mouse, keyboard, or remote control device.

 In accordance with another aspect of the invention, a user may select one or more files from which data is to be transmitted over a network from a
15 network device such as a server to another device such as a set-top box. Each of the files may include video data and audio data as well as other digital data. For instance, each file may include a movie or a karaoke video. The user may select via the set-top box one or more of a plurality of files associated with the server. In addition, the user may specify an order of transmission of the
20 selected files. Information identifying the selected files as well as the specified order of transmission may then be sent from the set-top box to the server. Data stored in these files may then be transmitted from the server to the set-top box in the order of transmission.

In accordance with another aspect of the invention, the present invention enables transmission of data to be billed within a multiple site system such as a hotel. More particularly, it is possible to bill a guest each time a movie or karaoke song is played (i.e., transmitted from the local server). Moreover, the hotel may wish to bill the guest an additional amount when the requested selection is transmitted from the central server over the Internet to the guest's hotel room (e.g., when the user accesses the central server via a web browser). Of course, it may be desirable to bill a guest once (e.g., when the associated file is loaded from the central server to the local server), allowing the guest to view the selection multiple times.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention, together with further advantages thereof, may best be understood by reference to the following description taken in conjunction with the accompanying drawings in which:

5

FIG. 1 is a block diagram illustrating an exemplary system in which the present invention may be implemented in accordance with an embodiment of the invention.

FIG. 2 is a block diagram illustrating an exemplary set-top box board layout that may be used to implement the present invention.

FIG. 3A is an exemplary screen shot that may be presented to a user upon start-up.

FIG. 3B is an exemplary screen shot illustrating the selection of karaoke songs and/or movies to be transmitted in accordance with the present invention.

FIG. 4 is an exemplary layout of a remote control that may be used to implement the present invention.

FIG. 5 is a process flow diagram illustrating a method of playing a movie or karaoke selection in accordance with an embodiment of the invention.

FIG. 6 is a process flow diagram illustrating a method of processing a user's voice input in accordance with an embodiment of the invention.

FIG. 7 is a process flow diagram illustrating a method of pausing a movie or karaoke selection in accordance with an embodiment of the invention.

FIG. 8 is a process flow diagram illustrating one method of stepping
5 transmission of data in accordance with an embodiment of the invention.

FIG. 9 is a process flow diagram illustrating one method of reducing the speed of data transmission to the set-top box in accordance with one embodiment of the invention.

FIG. 10 is a process flow diagram illustrating a method of initiating or
10 resuming the transmission of data in accordance with one embodiment of the invention.

FIG. 11 is a process flow diagram illustrating a method of selecting data files to be transmitted via a menu in accordance with one embodiment of the invention.

FIG. 12 is a process flow diagram illustrating one method of initiating
15 the transmission of data associated with a next selected video in accordance with one embodiment of the invention.

FIG. 13 is a process flow diagram illustrating a method of performing a seek in accordance with an embodiment of the invention.

FIG. 14 is a process flow diagram illustrating one method of
20 processing data received by the set-top box in accordance with one embodiment of the invention.

DETAILED DESCRIPTION OF THE PREFERRED
EMBODIMENTS

5 In the following description, numerous specific details are set forth in order to provide a thorough understanding of the present invention. It will be apparent, however, to one skilled in the art, that the present invention may be practiced without some or all of these specific details. In other instances, well known process steps have not been described in detail in order not to unnecessarily obscure the present invention.

10 With the recent advancement of digital technology, the way information flows and data are exchanged have taken a new direction. With the aid of video compression and decompression technology, digitized audio and video data can now be transmitted live across cities, states, and countries. Moreover, network bandwidth continues to increase through the introduction
15 of fast Ethernet, cable modem, Digital Subscriber Line (DSL), variations of DSL (xDSL), and Gigabit Ethernet. DSL service enables the transmission of data at rates up to 6.1 megabits (millions of bits) per second, enabling continuous transmission of motion video, audio, and even 3-D effects. Accordingly, real-time video transmission which requires high bandwidth is
20 now feasible.

Through the use of the present invention, files such as movies and karaoke videos may be downloaded to a local server and streamed to one or more client devices (e.g., set-top boxes). In addition, interactive control of the streamed data is made available through the set-top boxes. Accordingly, the present invention provides the traditional advantages of a conventional video recorder without the restrictions or limitations of a video recorder.

FIG. 1 is a block diagram illustrating an exemplary system in which the present invention may be implemented in accordance with an embodiment of the invention. The present invention is implemented in a network such as a local area network (LAN), which may be further coupled to a wide area network (WAN) such as the Internet. Within the network, one or more local servers 102 are used as the video-streaming server. Moreover, the local server(s) 102 may also be used as the content storage server that is capable of storing a plurality of files. One or more associated file servers 104 are used for user account management, content management, billing information, web server, firewall, and all other non-streaming related services. In addition, an equivalent central file server may be established at the central site which monitors and communicates with all the remote file servers. In order to decrease the costs associated with the local server 102 and limit the number of files available for transmission to each client, it may be preferable to use a suitable memory for storing approximately twenty files (e.g., karaoke files or movie files). However, this configuration is merely exemplary and a memory with a greater capacity may be implemented. These files may be supplied initially as well as downloaded from another server on the network, as well as

from the Internet. The local server 102 is adapted for being coupled (e.g., via an Ethernet switch 106) to a plurality of devices 108 (e.g., set-top boxes) that are each configured to transmit a control command to the local server 102 to control the initiation and flow of data associated with a particular file to the
5 requesting device 108. In addition, each of the devices 108 is capable of providing video and audio signals to associated monitors or televisions 110 when they are received from the local server 102.

Through each device 108, a client may initiate the transmission of data associated with a specified file via the local server 102. In addition, once
10 transmission of data is initiated, it may be desirable to interactively control the transmission of data from the local server 102. When the requested file is not available to the local server 102, the local server may access a central server 112 over the Internet via an Internet Service Provider (ISP) 114. The central server 112 preferably has a vast data store of files in an associated memory.
15 Alternatively, the client may independently download a requested file from the central server 112 via a web browser independently of transmission of the associated data to the client. For instance, when the user wants to watch a video that is not available on the local server, the user may access the central server and select one of a plurality of listed videos by clicking on the desired
20 title(s). The central server 112 may then send the file to the local server 102 for storage in the file server 104 and/or transmission to a requesting client. It is important to note that each client device 108 and the local server 102 preferably perform authentication prior to establishing a communication link.

When a file is transmitted from the central server 112 to a client via the local server 102, the transmission and interactive control of the transmitted data may be performed in a manner to enable real-time streaming and therefore instantaneous access to the data by a requesting client.

5 Alternatively, there may be a small or considerable delay, depending upon the transmission medium that is used. For instance, the transmission medium used to transmit data from the central server 112 to the local server 102, and from the local server 102 to each device 108 may include a traditional transmission medium such as a cable modem connection. In a WAN setting,
10 bandwidth cannot be guaranteed at a sustainable rate to support real-time broad-band video streaming. Thus, it is important to note that the benefit of a the local server 102 in a LAN setting is to provide sustainable bandwidth to guarantee uninterrupted real-time video streaming.

Traditional phone service transmits an analog signal which is
15 converted into digital information by a modem. However, the maximum amount of data that may be received using an ordinary modem is currently approximately 56 Kbps. In contrast, with various xDSL technologies, it is possible to receive data at rates of well over one million bits per second (Mbps), enabling continuous transmission of motion video, audio, and 3-D
20 effects. For example, current ADSL standards contemplate data receive rates on the order of 6Mbps. VDSL proposals contemplate data receive rates on the order of 25 or 50 Mbps. Thus, the delay involved in transmission of the requested data may be minimized through the use of a Digital Subscriber Line (DSL) or variations of DSL (xDSL). As a result, video quality is improved.

Moreover, since multiple devices 108 may be coupled to the central server 112 through a single Digital Subscriber Line via the local server 102, each client need not individually obtain DSL service. In this manner, the cost to the consumer is considerably reduced while enabling the consumer to

5 interactively control data transmission via the central server 112 with approximately instantaneous access.

The present invention may be used by a business such as a hotel to enable multiple rooms to access a local server maintained by the hotel. Since the local server is maintained by the hotel, the hotel may wish to bill a guest

10 each time a movie or karaoke song is played (i.e., transmitted from the local server 102 to a client device 108). Moreover, the hotel may wish to bill the guest an additional amount when the requested selection is transmitted from the central server over the Internet to the guest's hotel room (e.g., when the user accesses the central server via a web browser). Of course, it may be

15 desirable to bill a guest once (e.g., when the associated file is loaded from the central server to the local server) while allowing the guest to view the selection multiple times.

Billing information may be obtained in a variety of ways. For instance, billing information associated with the hotel room may be

20 automatically obtained. As another example, billing information such as credit card information may be obtained from the user upon selection of a video. As yet another example, a smart card reader may be provided to enable the user to charge room services to his or her smart card.

FIG. 2 is a block diagram illustrating an exemplary set-top box board layout that may be used to implement the present invention. In one embodiment, the set-top box board implements a standard Ethernet implementation and therefore includes a 10BaseT Interface 202, an Ethernet controller 204, an EEPROM 206 for storing an IP address associated with the set-top box board, and SRAMs 208, 210 for storing data obtained from the network (e.g., Internet). In addition, the set-top box includes a CPU 212 for running the operating system and for parsing an MPEG data stream. In

addition, a flash EPROM 214 may store software for drivers and other instructions necessary to implement the present invention. Moreover, this client software that is programmed into the flash EPROM 214 may be updated through the local server at any time for feature enhancement. System memory
5 216 (e.g., DRAM) is available for use by the CPU. In addition, EPLD 218 is adapted for routing signals among components, thereby providing the appropriate combinational logic for the set-top box. MPEG decoder 220 is provided for decompressing video and audio data received in the compressed data received by the set-top box. DRAM chips 222, 224, 226, 228, and 230
10 are provided for storing video data for the MPEG decoder 220.

After the video and audio data is decompressed by the MPEG decoder 220, the decompressed audio and video signals are processed separately. The decompressed video signal is then sent from the MPEG decoder 220 to a video encoder 242 to convert the digital video signal to an analog signal. The
15 analog video signal is then output at a video input/output 244. The decompressed audio signal is sent from the MPEG decoder 220 to digital-to-analog converter 236 and output via stereo output 238 and therefore through an amplifier (not shown).

In accordance with one embodiment, the set-top box includes karaoke
20 capabilities. Thus, in addition to the data (e.g., karaoke file) received from the network, one or more microphone inputs 231 and 232 are provided to enable users to sing along with a karaoke selection. In the embodiment shown, two microphone inputs are supported, although it should be appreciated that any desired number of microphones may be provided. When a karaoke singer

sings into a microphone, the audio signal is processed by an analog to digital converter 233. The digital audio signal is then sent to a karaoke audio processor 234. For instance, the karaoke audio processor 234 may be a digital karaoke audio processor such as model MED25102 available from Medianix Semiconductor, Inc., located at 100 View Street, Mountain View, California 94041. The digital audio signal processed by the karaoke processor 234 is then sent to digital-to-analog converter 236 and output via stereo output 238. In addition, a DRAM chip 240 is available for storing audio data for the karaoke processor 234. A standard audio input 246 is also provided. In addition, an infra-red interface controller (not shown) may be provided to enable communication with a remote control device.

In accordance with one embodiment, the set-top box is capable of switching between NTSC and PAL signals for world-wide adoption and compatibility. In addition, to implement a karaoke system, user interfaces in different languages may be provided by the set-top box. Similarly, files encoded with sound tracks in multiple languages may be provided at the local server to enable a sound track in a particular language to be selected at the set-top box.

FIG. 3A is an exemplary screen shot that may be presented to a user upon start-up. As shown, an initial screen 302 may be displayed which indicates one or more selections which may be input by a user. For instance, at start-up, a default selection type 304 may be presented to the user. More particularly, the selection type 304 of a file to be transmitted may be, for example, “karaoke” or “movie”. Thus, the default selection type 304 may be

“karaoke”, as shown. In addition, the user may indicate a particular selection 306 associated with the selection type 304. As shown, a number, title, or other mechanism may be used to identify each selection.

FIG. 3B is an exemplary screen shot illustrating the selection of
karaoke songs and/or movies to be transmitted in accordance with the present
invention. Once the user has entered one or more selections, a TV screen or
monitor 308 after all selections are entered is displayed. Thus, the selection
type 310 may be “movie” or “karaoke”, as shown. In addition, each
selection 312 is identified numerically in accordance with a pre-selected set of
selections available to the user. For instance, a manual may be provided to the
user identifying the selections available to the user.

As described above, the user sends control commands to the set-top
box indicating desired modifications to the flow of data to the set-top box. In
accordance with one embodiment, these control commands are sent to the set-
top box via an infra-red remote control. FIG. 4 is an exemplary layout of a
remote control that may be used to implement the present invention. A
TV/VIDEO key 402 enables a user to toggle between a television and video
mode. In addition, a NEXT key 404 stops the current video (e.g., movie or
karaoke) and starts the next video selected. An ENTER key 406 enables a
user to enter a number of key strokes. In addition, an NTSC/PAL key 408
enables a user to switch between NTSC and PAL mode, as described above.
A RESET key 410 reboots the set-top box. A VIEW/MENU key 412 enables
a user to view a video after all karaoke or movie selections are entered.
During video play, when the VIEW/MENU key 412 is toggled, a menu screen

is displayed to enable the user to add or edit the video selections. The user may then toggle the VIEW/MENU key 412 an additional time to start playing the current video selection. Number keys 0-9 413-430 may be used to identify video titles. Arrow keys 432-438 move the cursor up, down, right or left to enable a user to enter or modify selections.

Various control keys are provided to initiate or modify the flow of data to the set-top box. When a PLAY key 440 is pressed, a selected video (e.g., movie or karaoke selection) is played at normal speed from either a PAUSE, STEP, or SLOW mode, each of which will be described in further detail below. In addition, in accordance with one embodiment, a percent video played indicator is displayed on the screen to indicate the amount of the video that remains to be transmitted. When a SLOW key 442 is pressed, the video speed is slowed (e.g., to one-half normal speed). The PLAY key 440 may then be pressed to resume to normal speed. Similarly, when a PAUSE key 444 is pressed, the video is paused until the PLAY key 440, the SLOW key 442, or a STEP key 446 is pressed. Once the STEP key 446 is pressed, the video is advanced by one frame at a time.

Rather than viewing the entire video, the user may wish to view only specific portions of the video. When a SEEK key 448 is pressed during video play, the user may select a percentage of the video file to jump to. The video then jumps to that location and begins to play starting from that location. The seek location may be any location in the video file. Accordingly, the seek function may operate in forward or reverse.

In addition to video control keys described above, karaoke control keys are provided to enable the user to modify the audio signal associated with the karaoke music and/or the user's voice. The key functions may be implemented through the use of a conventional karaoke audio processor such as karaoke audio processor MED25102 available from Medianix. Various keys are provided on the remote control to implement various functions available in a karaoke processor. For instance, KEY- 450 decreases the key of the music, KEY + 452 increases the key of the music, KEY N 454 returns the key of the music to neutral, VOL + 456 increases the microphone volume, VOL – 458 decreases the microphone volume, ECHO + 460 increases microphone echo, and ECHO – 462 decreases microphone echo. When FADER 464 key is pressed, the vocal portion of the music is silenced. PITCH 466 changes the pitch of the karaoke singer's voice that is received through the microphone by shifting the pitch one semi-note with each depression. HARMONY 468 adds a pitch-shifted and a non pitch-shifted microphone signal to create the sound of two vocalists. MUTE 470 mutes the associated microphone.

As described above with reference to FIG. 4, a remote control may enable a user to modify the flow of data to a set-top box. However, other input devices may be used. For instance, such input devices include, but are not limited to, a keyboard or a mouse.

Through the use of the present invention, data may be transmitted from a particular network device to a requesting network device. In accordance with one embodiment, data is transmitted to a set-top box from a local server.

Of course, when a particular file is not directly accessible by the local server, the file may be downloaded from a central server (e.g., to a file server associated with the local server). In addition, data may be transmitted from the central server via the local server. The downloading and/or transmission from the central server to the local server may be initiated by the user (e.g., via a web browser) or by the local server when the file cannot be directly accessed by the local server. Once data flow associated with a file is initiated, the data flow may be modified through the sending of various control commands by the user (e.g., via an infra-red remote control). In accordance with one embodiment, data flow from the local server may be modified by the user. The flow of data and modification of the data flow from the local server will be described in further detail below with reference to FIG. 5 through FIG. 14. However, it will be understood that the flow of data and modification of the data flow may also be performed via the central server.

FIG. 5 is a process flow diagram illustrating a method of playing a movie or karaoke selection in accordance with an embodiment of the invention. When the set-top box is turned on at block 502, a menu is displayed at block 504. For instance, a screen such as that illustrated in FIG. 3A may be displayed to enable a user to enter one or more karaoke or movie selections as shown in FIG. 3B. The user enters one or more selections at block 506 to indicate those movies, karaoke selections or other video files to be transmitted to the set-top box. The user then selects a control command at block 508 to initiate, terminate or otherwise modify the flow of data to the set-top box. Thus, the control command generally indicates a desired

modification of the flow of data to the set-top box. More particularly, this may be accomplished by pressing a key on a remote control such as that described above with reference to FIG. 4. For instance, the user may select the VIEW command in order to view a selected video.

5 When the control command (e.g., view command) is received by the set-top box at block 510, the set-top box deciphers the infra red control signal and sends the control command to a CPU of the set-top box at block 512. The set-top box then sends the control command to the local server at block 514. The local server receives the control command at block 516. In addition, the
10 local server may receive a signal indicating a current video selection. The local server then sends a compressed data stream over a network to the set-top box at block 518. More particularly, the compressed data stream may include audio, video and other digital data. The set-top box then processes the data received from the local server at block 520. One method of processing the
15 data by the set-top box is described in further detail below with reference to FIG. 14.

 In accordance with one embodiment, the user may initiate and modify the transmission of karaoke data from a server to the set-top box. Thus, a first audio signal is received by the set-top box from a server and processed, as will
20 be described below with reference to FIG. 14. In addition, the user may sing along with the karaoke selection through a microphone, creating a second audio signal. FIG. 6 is a process flow diagram illustrating a method of processing a user's voice input in accordance with an embodiment of the invention. More particularly, when a user sings through a microphone

connected to the set-top box at block 600, the audio signal is processed by an analog to digital converter at block 602. In addition, the user may select an audio control command as shown at block 604 via a karaoke control key as described above with reference to FIG. 4 to modify the audio signal that is ultimately produced by the set-top box. For instance, the user may wish to adjust the volume or pitch. The singer's voice is then processed by the karaoke processor at block 606 to modify the second audio signal. This modified second audio signal is then sent to a digital to analog converter at block 608. The resulting analog audio signal is then sent to an amplifier at block 610.

The flow of data to the set-top box may be modified in a variety of ways. As described above with reference to FIG. 4, the flow of data may be modified in a variety of ways. For instance, the user may wish to pause a video, or press a remote control key such as STEP, SLOW, PLAY, MENU, NEXT, or SEEK. Exemplary process flow diagrams illustrating such possible modifications to the flow of data to a set-top box will be described in further detail below with reference to FIG. 7 through FIG. 13.

When a user wishes to pause the transmission of data to the set-top box, the user may press the PAUSE button on the remote control. FIG. 7 is a process flow diagram illustrating a method of pausing a movie or karaoke selection in accordance with an embodiment of the invention. As shown, when a user selects a pause control command at block 702, the set-top box deciphers the infra-red control at block 704. The pause control command is then sent to a CPU of the set-top box at block 706. The set-top box sends the

pause control command to the local server at block 708. In response, as shown at block 710, the local server stops sending data to the set-top box until further instruction.

A user may press the STEP key when he or she wishes to step the transmission of data (e.g., by a single frame). FIG. 8 is a process flow diagram illustrating one method of stepping transmission of data in accordance with an embodiment of the invention. As shown at block 802, a user may select the step control command through pressing the STEP key on a remote control. When the infra red signal is received by the set-top box, the set-top box deciphers the infra red signal at block 804 and sends a step control command to a CPU of the set-top box at block 806. The set-top box (e.g., CPU) then transmits this step control command to the local server at block 808. In response, the local server advances the appropriate video by a frame by sending data associated with that frame to the set-top box at block 810. The set-top box then processes the data received from the local server at block 812, as will be described in further detail below with reference to FIG. 14.

A user may similarly wish to modify the speed of transmission of data to the set-top box over the network. For instance, the user may wish to reduce as well as increase the speed of data transmission. FIG. 9 is a process flow diagram illustrating one method of reducing the speed of data transmission to the set-top box in accordance with one embodiment of the invention. When a user wishes to slow the speed of data transmission, the user may press a SLOW key on a remote control as shown at block 902, as described above with reference to FIG. 4. The set-top box deciphers the infra red control at

block 904 and a slow control command indicating that the data transmission is to be slowed is sent to a CPU of the set-top box at block 906. The set-top box then sends the slow control command to the local server at block 908. In response to the control command, the local server reduces the speed with which data (e.g., frames) are sent to the set-top box at block 910. The local server then continues to send compressed data over the network to the set-top box at block 912. The set-top box then processes the data received from the local server at block 914, which will be described in further detail below with reference to FIG. 14.

The user may also wish to initiate the transmission of data over the network to the set-top box (e.g., from a pause mode). Alternatively, the user may wish to resume transmission of data to a normal speed from a step or slow mode. FIG. 10 is a process flow diagram illustrating a method of initiating or resuming the transmission of data in accordance with one embodiment of the invention. As shown at block 1002, the user may select the play control command at block 1002. This may be accomplished through pressing the PLAY key on a remote control such as that illustrated in FIG. 4. For instance, the PLAY key may be pressed from the pause, step, or slow mode. The set-top box then deciphers the infra red control at block 1004 and a play control command indicating that initiation of the transmission of data is requested is sent to a CPU of the set-top box at block 1006. The set-top box then sends the play control command to the local server at block 1008. The local server then initiates the transmission of data at block 1010. More particularly, the local server may initiate the transmission of data or simply

return to normal speed with which data is sent to the set-top box. The local server continues to send compressed data over the network to the set-top box at block 1012. In addition, in accordance with one embodiment, the local server sends a percentage value indicating a percent of the file that has been transmitted (e.g., percent of a movie that has been played over the network). The set-top box processes the data it receives from the local server at block 1014, as will be described in further detail below with reference to FIG. 14. The set-top box further displays the percent of the selection that has been transmitted to the set-top box and therefore played for the user at block 1016. As described above, the data may be associated with any file, such as a movie or karaoke selection.

The user may wish to edit his or her selections that have been previously entered via a screen such as that illustrated in FIG. 3A and FIG. 3B. In this manner, the user may specify via the set-top box an order of transmission of one or more files. The files may be of varying types, such as those storing movies or karaoke videos. It is important to note that the files being selected are not stored locally at the set-top box, but identify files stored in association with a remotely located server on the network.

FIG. 11 is a process flow diagram illustrating a method of selecting data files to be transmitted via a menu in accordance with one embodiment of the invention. As shown, the user may select a menu control command at block 1102 which sends an infra red signal to the set-top box. The set-top box deciphers the infra red control at block 1104 and sends this menu control command to a CPU of the set-top box at block 1106. The set-top box sends

1 this menu control command over the network to the local server at block
2 1108. The local server then stops sending compressed data over the network
3 to the set-top box at block 1110. For instance, the local server may stop
4 sending data until a VIEW/MENU key on a remote control such as that
5 illustrated in FIG. 4 is toggled by the user.

6 The set-top box then displays a menu of selections at block 1112. As
7 one example, the menu may present the user with a number of possible files
8 (e.g., movie or karaoke) to be transmitted to the set-top box. As another
9 example, the menu may simply be a screen such as that presented in FIG. 3A
10 which may enable a user to enter as well as modify his or her selections as
11 illustrated in FIG. 3B. When presented with this menu, the user may add as
12 well as edit the menu selections that are displayed at block 1114. As one
13 example, the user may have be presented with a screen illustrating a single
14 previously entered selection. The user may then enter or select additional
15 selections up to a maximum number of permissible selections. As another
16 example, the menu may present the user with a number of selections
17 previously selected by the user. The user may then modify one or more of
18 these selections.

19 When the user decides to view one or more of his selections, the view
20 control command may be selected by again toggling the VIEW/MENU key at
21 block 1116. The set-top box deciphers the infra-red control at block 1118 and
22 a view control command is sent to a CPU of the set-top box at block 1120.
23 The set-top box sends the view control command over the network to the local
24 server at block 1122. For instance, the view control command may identify

one or more files to be transmitted over the network. In addition, the view control command may also indicate the order of transmission of those files. Of course, the view control command may also designate a starting point from which compressed data is to be transmitted. The starting point may indicate a specific file as well as a location (e.g., percentage) within that file. The local server then resumes sending compressed data over the network to the set-top box at block 1124. The set-top box then processes the data it receives at block 1126, which will be described in further detail below with reference to FIG. 14.

Rather than allowing all selections to play consecutively, the user may wish to terminate a current video and start the next selected video. FIG. 12 is a process flow diagram illustrating one method of initiating the transmission of data associated with a next selected video in accordance with one embodiment of the invention. When the user wishes to stop the transmission of data associated with a first video and start the transmission of data associated with a second video, the user may select the next control command at block 1202 by pressing the NEXT key on a remote control such as that illustrated in FIG. 4. The set-top box deciphers the infra red control at block 1204. A next control command indicating that a next video is selected is then sent to a CPU of the set-top box at block 1206. The set-top box sends the next control command to the local server indicating that the next video is selected as shown at block 1208. For instance, the next control command may directly or indirectly identify a currently selected video. At block 1210 the local server stops sending compressed data associated with the previous selection

over the network to the set-top box. The local server then sends compressed data associated with the current selection over the network to the set-top box at block 1212. The set-top box then processes the data it receives from the local server at block 1214. One method of processing the compressed data will be described in further detail below with reference to FIG. 14.

When a user wishes to initiate transmission of data from a particular location in a file, the user may press the SEEK key of a remote control such as that illustrated in FIG. 4. FIG. 13 is a process flow diagram illustrating a method of performing a seek in accordance with an embodiment of the invention. As shown at block 1302 the user may select the seek control command by pressing the SEEK key of a remote control at block 1302. In addition, the user indicates a location in the video file from which data transmission is desired at block 1304. In accordance with one embodiment, the user selects a percentage of a video file that has been transmitted. The set-top box deciphers the infra red control at block 1306 and the corresponding seek control command indicating the desired percentage is sent to a CPU of the set-top box at block 1308.

In accordance with one embodiment, the starting point in the file from which data is to be transmitted is calculated by the set-top box. More particularly, when the file is initially selected, the local server sends information associated with the file such as the size of the file to the set-top box. For instance, when an MPEG file is transmitted, file information is transmitted in the initial packets that are transmitted. The set-top box uses the size of the file and the percentage to determine a starting point in the file at

block 1310. The set-top box then sends an indicator of the desired file location to the local server at block 1312.

Alternatively, the calculation of the starting point may be performed by the local server. In accordance with this embodiment, the set-top box
5 sends the seek control command indicating the desired percentage over the network to the local server at block 1310. When the local server receives the seek control command, the local server uses the size of the file and the percentage to determine a starting point in the file at block 1312.

The local server then “jumps” to this starting point in the file at block
10 1314 and initiates the transmission of compressed data from the starting point over the network to the set-top box at block 1316. The set-top box then processes the data it receives from the local server at block 1318, which will be described in further detail below with reference to FIG. 14.

As described above, when the set-top box receives compressed data
15 sent over the network, the set-top box processes this data. FIG. 14 is a process flow diagram illustrating one method of processing data received by the set-top box in accordance with one embodiment of the invention. A variety of commands sent by the set-top box result in compressed video data being sent to a requesting client (e.g., set-top box). When the client sends a request to a
20 server asking the server to send compressed video data to the client, the server splits the associated compressed video data file (or portion thereof) into multiple packets and sends the packets to the client. As shown at block 1402 the set-top box receives the compressed video data from the local server. An MPEG decoder chip then decompresses video and audio data in the

compressed data at block 1404. The decompressed video signal is then sent to a video encoder to convert the digital signal to an analog signal at block 1406. The resulting analog signal is then output to a television or monitor at block 1408. The data received by the set-top box may be stored for future use.

- 5 However, it may be desirable to delete the data once it is provided by the set-top box to the user. In this manner, a video may be displayed in real-time onto a television screen.

In addition to the decompressed video data, the decompressed audio data is also processed by the set-top box. More particularly, in accordance
10 with the karaoke embodiment, the decompressed audio signal is sent to the karaoke processor at block 1410. The processed audio signal is then sent to a digital to analog converter at block 1412. The resulting analog audio signal is then sent to an amplifier at block 1414.

When data is transmitted from the central server to the set-top box via
15 a local server, the local server may store a copy of this data (e.g., in an associated file server). Alternatively, it may be desirable to erase this copy once the data is transmitted to a requesting set-top box.

The present invention may be used in a variety of environments. For instance, the above-described system may be configured as a networked
20 karaoke system to enable a plurality of rooms to access karaoke songs concurrently without the intervention of a human operator. The present invention may also be used to provide hotels a cost-effective solution to deliver movies to hotel guests. Moreover, it may also be useful in hospitals to enable bed-ridden patients to watch movies or surf the Internet. Schools may

might output information to the network in the course of performing the above-described method steps. Such information may be received from and outputted to the network, for example, in the form of a computer data signal embodied in a carrier wave. The network may also be a wireless network.

5 Through the use of the present invention, video, audio, and karaoke functionality are integrated in a single system capable of interfacing to a standard television. Since the present invention is implemented in a set-top box, it is compact and portable. Moreover, since a computer system is not required, the present invention may be manufactured at a relatively low cost to
10 the consumer.

 Although illustrative embodiments and applications of this invention are shown and described herein, many variations and modifications are possible which remain within the concept, scope, and spirit of the invention, and these variations would become clear to those of ordinary skill in the art
15 after perusal of this application. For instance, the present invention is described as transmitting data from a local server within the context of a digital television receiver. However, the present invention may be used in other contexts, such as through transmitting data from another server (e.g., central server) via the local server. For instance, the present invention may
20 permit access to a central server on the Internet. Similarly, the present invention may be implemented across a plurality of staged servers, enabling information to be transmitted across the Internet. Moreover, the above described process blocks are illustrative only. Therefore, the present invention may be performed using alternate process blocks as well as alternate data

5

Claims

What is claimed is:

5

1. In a network including a local server coupled to a central server, the local server being coupled to a plurality of network devices, a method of interactively controlling from one of the plurality of network devices a flow of audio visual data from the central server to the network device, the method

10 comprising:

obtaining a control command at the network device, the control command indicating a desired modification to the flow of the audio visual data from the central server to the network device;

15 sending the control command from the network device to the central server via the local server; and

receiving a modified flow of the audio visual data from the central server at the network device in response to the control command.

20 2. In a network including a local server coupled to a central server, the local server being coupled to a plurality of network devices, a method of interactively controlling from one of the plurality of network devices a flow of audio visual data from the central server to the network device, the method comprising:

25 obtaining a control command at the network device, the control command indicating a desired modification to the flow of the audio visual data from the central server to the network device;

sending the control command from the network device to the central server via the local server; and

30 modifying the flow of the audio visual data from the central server to the network device in response to the control command.

3. The method as recited in claim 2, wherein modifying the flow of the audio visual data from the central server to the network device in response to the control command comprises:

5 modifying the flow of the audio visual data from the central server to the local server; and

when modifying the flow of the audio visual data from the central server to the local server includes sending a compressed audio visual data stream to the local server, sending the compressed audio visual data stream to
10 the network device.

4. The method as recited in claim 3, further comprising:

prior to sending the compressed audio visual data stream to the network device, storing the compressed audio visual data stream in a memory
15 associated with the local server.

5. The method as recited in claim 3, wherein sending the compressed audio visual data stream to the network device is performed in real time.

20

6. In a network including a local server coupled to a central server, the local server being coupled to a plurality of network devices, a method of interactively controlling from one of the plurality of network devices a flow of
25 audio visual data from the central server to the network device, the method comprising:

receiving a control command at the central server from one of the plurality of network devices, the control command indicating a desired modification to the flow of the audio visual data from the central server to the
30 network device; and

modifying the flow of the audio visual data from the central server to the local server in response to the control command, thereby enabling the flow

of audio visual data from the central server to the network device to be interactively controlled by the network device.

7. In a network including a local server coupled to a central server, the local server being coupled to a plurality of network devices, a method of transmitting a audio visual data stream from the central server to one of the plurality of network devices, the method comprising:

receiving a control command from one of the plurality of network devices, the control command indicating a desired modification to the audio visual data stream being transmitted from the central server to the one of the plurality of network devices via the local server; and

sending a modified audio visual data stream from the central server to the local server in response to the control command, thereby enabling a audio visual data stream being transmitted from the central server to the network device to be interactively controlled from the network device.

8. In a network including a local server coupled to a central server, the local server being coupled to a plurality of network devices, a method of interactively controlling from one of the plurality of network devices a flow of audio visual data from the central server to the network device, the method comprising:

receiving a control command at the local server from the network device, the control command indicating a desired modification to the flow of the audio visual data from the central server to the network device;

sending the control command to the central server;

receiving a modified audio visual data flow from the central server in response to the control command; and

transmitting the modified audio visual data flow from the local server to the network device, thereby enabling the network device to modify the flow of the audio visual data from the central server to the network device.

9. The method as recited in claim 8, further comprising:

determining whether a file associated with the control command is stored in a memory associated with the local server; and

performing the sending and receiving steps when the file associated
5 with the control command is not stored in the memory associated with the local server.

10. The method as recited in claim 8, further comprising:

prior to sending the modified audio visual data flow from the local
10 server to the network device, storing the modified audio visual data flow in a memory associated with the local server.

11. The method as recited in claim 8, wherein the modified audio visual data flow is associated with a first file that is different from a second file

15 associated with the audio visual data that is sent from the central server to the network device.

12. The method as recited in claim 8, wherein the modified audio visual data flow is sent from the local server to the network device at a speed

20 identical to that of the modified audio visual data flow received from the central server.

13. The method as recited in claim 8, wherein the modified audio visual data flow is received by the local server at a speed that is different from a

25 speed of the flow of the audio visual data from the central server to the network device prior to sending the control command to the central server.

14. The method as recited in claim 8, wherein the modified audio visual data flow is initiated at a first point in a file that is different from a second

30 point in the file at which the control command is received at the local server during the flow of the audio visual data.

16. The method as recited in claim 15, wherein the first file is different from the second file.

17. The method as recited in claim 15, wherein the first file identical to the second file.

18. The method as recited in claim 13, wherein the first file is a movie file
15 or a karaoke file and the second file is a movie file or a karaoke file.

19. In a network including a local server coupled to a central server, the
local server being coupled to a plurality of network devices, a method of
20 interactively controlling from one of the plurality of network devices a flow of
audio visual data from the central server to the network device, the local
server having a memory associated therewith, the method comprising:

receiving a control command at the local server from the network
device, the control command indicating a desired initiation of audio visual
25 data flow associated with a specified file;

determining whether the specified file is stored in the memory associated with the local server; and

when it is determined that the specified file is not stored in the memory
associated with the local server, sending the control command to the central
30 server.

20. The method as recited in claim 19, further comprising:

when it is determined that the specified file is not stored in the memory associated with the local server, receiving an audio visual data stream from the central server in response to the control command and sending the audio visual data stream from the local server to the network device.

21. The method as recited in claim 19, further comprising:

receiving an audio visual data stream from the central server at the local server in response to the control command; and
sending the audio visual data stream from the local server to the network device.

22. The method as recited in claim 20, further comprising:

when it is determined that the specified file is not stored in the memory associated with the local server, storing the audio visual data stream in a file in the memory associated with the local server.

23. The method as recited in claim 19, further comprising:

receiving compressed data associated with the specified file from the central server at the local server in response to the control command; and
storing the specified file in the memory associated with the local server.

24. In a local server, the local server being coupled to a central server in a network, the local server being coupled to a plurality of network devices, a method of interactively controlling from one of the plurality of network devices a flow of audio visual data from the central server to the network

device, the local server having a memory associated therewith, the method comprising:

receiving a control command at the local server from the network device, the control command indicating a desired initiation of data flow associated with a specified file;
sending the control command to the central server;
receiving an audio visual data stream from the central server at the local server in response to the control command; and
transmitting the audio visual data stream from the local server to the network device.

25. The method as recited in claim 24, further comprising:
storing the audio visual data stream in the memory associated with the local server.

26. A central server adapted for being coupled to a local server, the local server being coupled to a plurality of network devices, the central server being adapted for transmitting a audio visual data stream from the central server to one or more of the plurality of network devices via the local server, comprising:
a processor; and
a memory, the memory storing therein instructions for:
receiving a control command from one of the plurality of network devices, the control command indicating a desired modification to the audio visual data stream being transmitted from the central server to the one of the plurality of network devices via the local server; and
sending a modified audio visual data stream from the central server to the network device via the local server in response to the

control command, thereby enabling an audio visual data stream being transmitted from the central server to the network device to be interactively controlled from the network device.

5

27. A local server adapted for being coupled to a central server and to a plurality of network devices, the local server being configured for interactively controlling a flow of audio visual data from the central server to one of the plurality of network devices, comprising:

10

a processor; and

a memory storing therein the following instructions:

instructions for receiving a control command at the local server from the network device, the control command indicating a desired modification to the flow of the audio visual data from the central server to the network device;

15

instructions for sending the control command to the central server;

instructions for receiving a modified audio visual data flow from the central server in response to the control command; and

20

instructions for transmitting the modified audio visual data flow from the local server to the network device, thereby enabling the network device to modify the flow of the audio visual data from the central server to the network device.

25

28. The local server as recited in claim 27, the memory further comprising: instructions for determining whether a file associated with the control command is stored in a memory associated with the local server; and

instructions for performing the sending and receiving steps when the file associated with the control command is not stored in the memory

30

associated with the local server.

a processor; and

a memory, the memory storing therein the following instructions:

instructions for receiving a control command at the local server from
10 the network device, the control command requesting an initiation of audio
visual data flow associated with a specified file;

instructions for determining whether the specified file is stored in a memory associated with the local server; and

instructions for sending the control command to the central server
15 when it is determined that the specified file is not stored in the memory
associated with the local server.

30. The local server as recited in claim 29, the memory further comprising:
instructions for receiving an audio visual data stream from the central
20 server in response to the control command and sending the audio visual data
stream from the local server to the network device.

25 31. The local server as recited in claim 30, the memory further comprising:
instructions for storing the audio visual data stream in a file in the
memory associated with the local server.

30 32. A system for enabling a continuous stream of audio visual data to be
sent to a network device, comprising:

a central server having a memory associated therewith, the memory having stored therein a plurality of files;

a local server coupled to the central server and having a memory associated therewith, the local server configured to obtain a file from the central server when the file that is requested is not stored in the memory associated with the local server; and

a plurality of network devices coupled to the local server, each of the plurality of network devices being configured for sending a file request to the local server, the file request indicating a request for audio visual data associated with a requested file.

33. The system as recited in claim 32, further comprising:
a memory associated with the local server;
wherein the local server is configured to store the file in the memory when the file is obtained from the central server.

34. The system as recited in claim 33, wherein the local server is configured to transmit an audio visual data stream associated with the file to one of the plurality of network devices when the file is obtained from the central server in response to the file request received from the one of the plurality of network devices.

35. The system as recited in claim 32, wherein the local server is configured to transmit an audio visual data stream associated with the file to one of the plurality of network devices when the file is obtained from the central server in response to the file request received from the one of the plurality of network devices.

36. The system as recited in claim 35, wherein the central server is configured to transmit a modified audio visual data stream in response to a control command received from the one of the plurality of network devices and wherein each of the plurality of network devices is configured to send a control command indicating a desired modification to the audio visual data stream being transmitted to the corresponding network device.

37. A local server adapted for being coupled to a central server and a plurality of network devices, the local server being configured to interactively control from one of the plurality of network devices a flow of audio visual data from the central server to one of the plurality of network devices, comprising:

a processor; and

a memory associated therewith, the memory storing therein the following instructions:

instructions for receiving a first control command at the local server from the network device, the first control command indicating a desired initiation of data flow associated with a specified file;

instructions for forwarding the first control command to the central server;

instructions for receiving an audio visual data stream from the central server at the local server in response to the first control command;

instructions for transmitting the audio visual data stream from the local server to the network device;

instructions for receiving a second control command at the local server from the network device, the second control command indicating a desired modification of data flow;

instructions for forwarding the second control command to the central server;

instructions for receiving a modified audio visual data stream from the central server at the local server in response to the second control command; and

instructions for transmitting the modified audio visual data stream
5 from the local server to the network device.

38. The local server as recited in claim 37, the memory further comprising:
10 instructions for storing the first audio visual data stream in the memory associated with the local server.

39. The local server as recited in claim 37, wherein the specified file is a
15 karaoke file.

40. The local server as recited in claim 37, wherein the specified file is a
movie file.

20
41. A network device adapted for being coupled to a network including a local server coupled to a central server, the local server adapted for being coupled to a plurality of network devices, the network device being adapted
25 for interactively controlling a flow of audio visual data from the central server to the network device, comprising:

a processor; and

a memory, at least one of the processor and the memory being adapted
for:

30 obtaining a control command at the network device, the control command indicating a desired modification to the flow of the audio visual data from the central server to the network device;

5 sending the control command from the network device to the
 central server via the local server; and
 receiving a modified flow of the audio visual data from the
 central server at the network device in response to the control
 command.

42. A computer-readable medium adapted for interactively controlling
10 from a network device a flow of audio visual data from a central server to the
 network device, the central server being connected to the network device via a
 local server adapted for being coupled to a plurality of network devices,
 comprising:
 instructions for receiving a control command from the network device,
15 the control command indicating a desired initiation of data flow associated
 with a specified file;
 instructions for connecting to the central server via the Internet;
 instructions for sending the control command to the central server; and
 instructions for receiving an audio visual data stream transmitted from
20 the central server via the local server in response to the control command.

43. The computer-readable medium as recited in claim 42, further
 comprising:
25 instructions for transmitting the audio visual data stream to the
 network device.

44. The computer-readable medium as recited in claim 42, further
30 comprising:
 instructions for requesting that the specified file be downloaded to the
 local server.

45. The computer-readable medium as recited in claim 42, wherein the specified file is a karaoke file.

5 46. The computer-readable medium as recited in claim 42, wherein the specified file is a movie file.

47. A computer-readable medium adapted for interactively controlling from a network device a flow of audio visual data from a central server to the
10 network device, the central server being connected to the network device via a local server adapted for being coupled to a plurality of network devices, comprising:

instructions for connecting to the central server via the Internet;
instructions for receiving a control command from the network device,
15 the control command requesting that a specified file be downloaded from the central server to the local server, thereby enabling transmission of audio visual data associated with the specified file to be controlled at the local server by the network device; and
instructions for sending the control command to the central server.

20

48. The computer-readable medium as recited in claim 47, further comprising:

instructions for selecting the specified file from one of a plurality of files stored in a memory associated with the central server.

25

49. The computer-readable medium as recited in claim 47, wherein the specified file is a karaoke file.

50. The computer-readable medium as recited in claim 47, wherein the
30 specified file is a movie file.

INTERACTIVE DATA TRANSMISSION SYSTEM HAVING STAGED SERVERS

5

ABSTRACT OF THE DISCLOSURE

Methods and apparatus for use in a network including a local server coupled to a central server, the local server being coupled to a plurality of network devices, for interactively controlling from one of the plurality of network devices a flow of audio visual data from the central server to the network device, comprising obtaining a control command at the network device, the control command indicating a desired modification to the flow of the audio visual data from the central server to the network device. The control command is sent from the network device to the central server via the local server. A modified flow of the audio visual data is then received from the central server at the network device in response to the control command.

FIC. 1

F. G. 2



Examples of entering video titles:

Start-up TV screen

304 302

Karaoke	0
Karaoke	0
Karaoke	0
Karaoke	0
Karaoke	0
Karaoke	0
Karaoke	0

FIG. 3A

TV screen after all titles are entered.

308 310 312

Movie	35
Karaoke	68
Karaoke	52
Karaoke	818
Karaoke	73
Movie	19
Movie	27

FIG. 3B

IR REMOTE CONTROL INSTRUCTIONS

The following diagram is the IR remote control key positions.

Handwritten frequency codes around the grid:

- Top row: ~402 (above TV/VIDEO), ~404 (above NEXT), ~406 (above ENTER)
- Left side: 408 (next to row 1-4), 442 (next to row 5-8)
- Bottom: 446 (below STEP), 444 (below PAUSE)

TV/VIDEO	NEXT		ENTER
1 414	2 416	3 418	VOL + ~456
4 420	5 422	6 424	VOL -- ~458
7 416	8 428	9 430	ECHO + ~460
NTSC/PAL	0 413	RESET	ECHO -- ~462
	↑ 432	410	FADER ~464
← 436	View/Menu 412	→ 438	PITCH ~466
	↓ 434	SEEK 418	HARMONY ~468
KEY 450	KEY N 414	KEY 452	MUTE ~470
SLOW	STEP	PAUSE	PLAY ~440

Main Control Keys:

FIG. 4

NTSC/PAL – Switches between NTSC and PAL mode. Default is PAL mode after power-up

Reset – Reboots the set-top box.

Next – Stops the current video and starts the next video selected.

Enter – Press **enter** to change from karaoke to movie and vice versa.
Press **enter** to erase title 0.
Press **enter** after entering karaoke or movie title is completed.

View/Menu – After all karaoke or movie titles are entered, press this key to start playing video.
During video play, when this key is pressed, menu screen would come on and video titles can be added or edited. Press this key again to start playing the video.

Up/Down/Right/Left arrow keys – Moves the cursor (indicated by gold color) up or down, right or left.

0-9 number keys – Numbers are used to identify video titles.

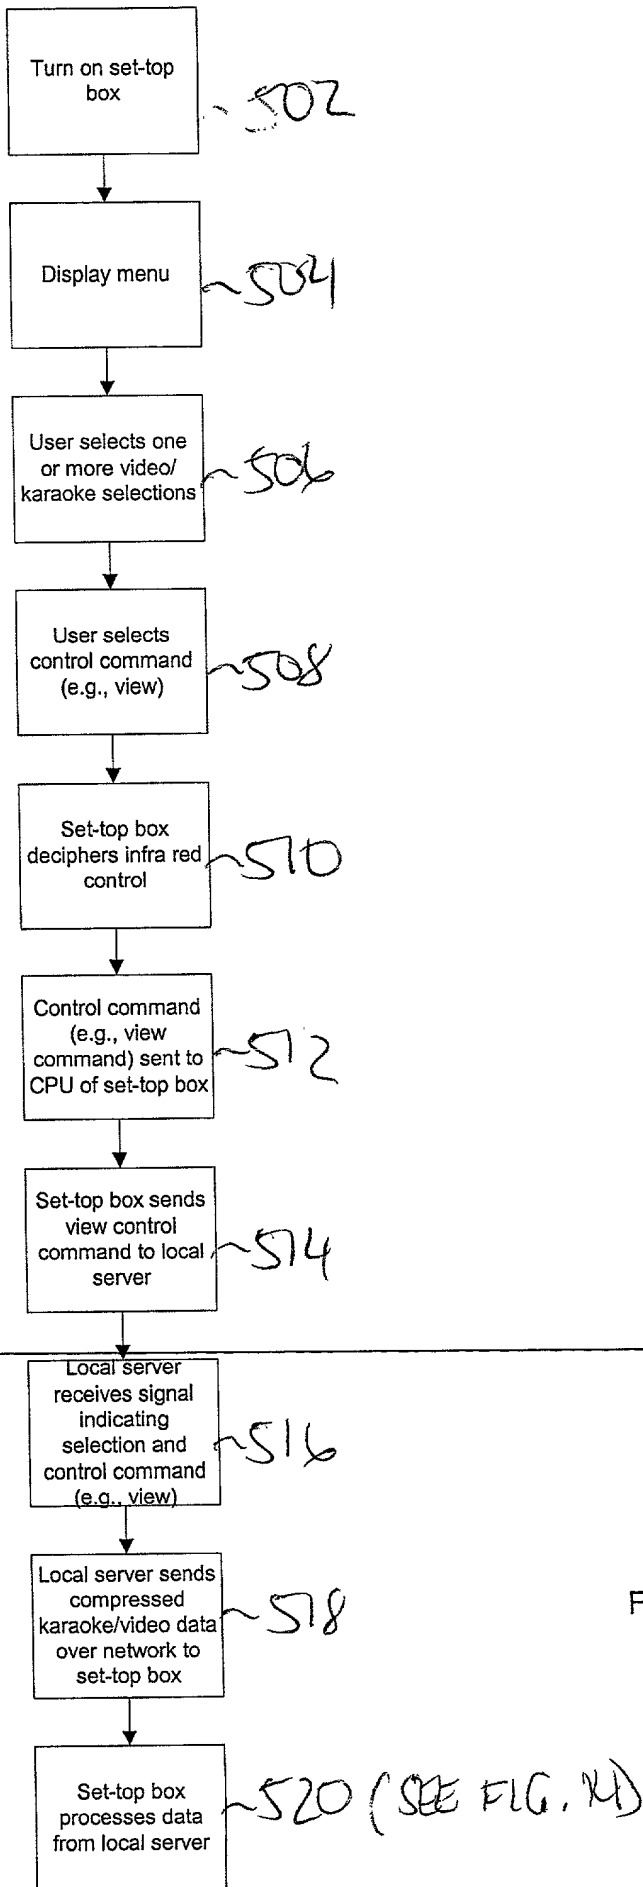


FIG. 5

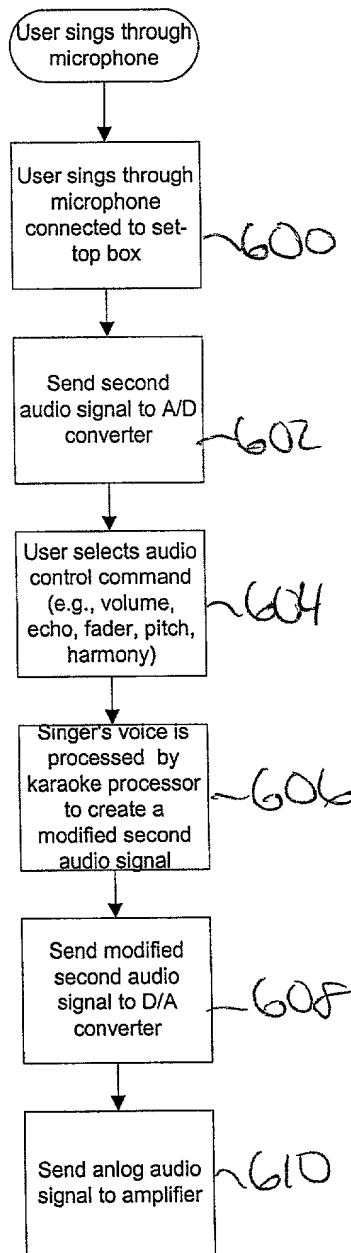


FIG. 6

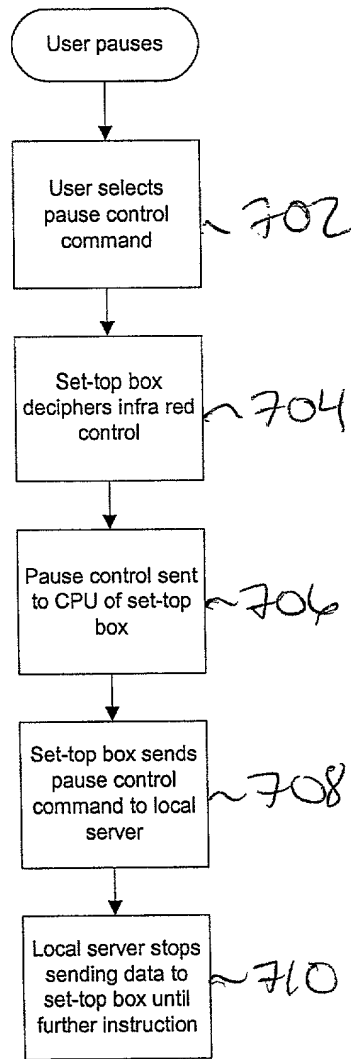


FIG. 7

```
graph TD; A([User selects step]) --> B[User selects step control command 802]; B --> C[Set-top box deciphers infra red control 804]; C --> D[Step control sent to CPU of set-top box 806]; D --> E[Set-top box sends step control command to local server 808]; E --> F[Local server advances video by one frame by sending frame data to set-top box 810]; F --> G[Set-top box processes data from local server 812];
```

The flowchart illustrates the process of step control, starting with a user selecting a step, followed by the user selecting a step control command (802). The set-top box then deciphers the infra red control (804), and the step control is sent to the CPU of the set-top box (806). The set-top box then sends the step control command to the local server (808). The local server advances the video by one frame by sending frame data to the set-top box (810). Finally, the set-top box processes the data from the local server (812). A note at the bottom right states "(SEE FIG. 14)".

FIG. 8

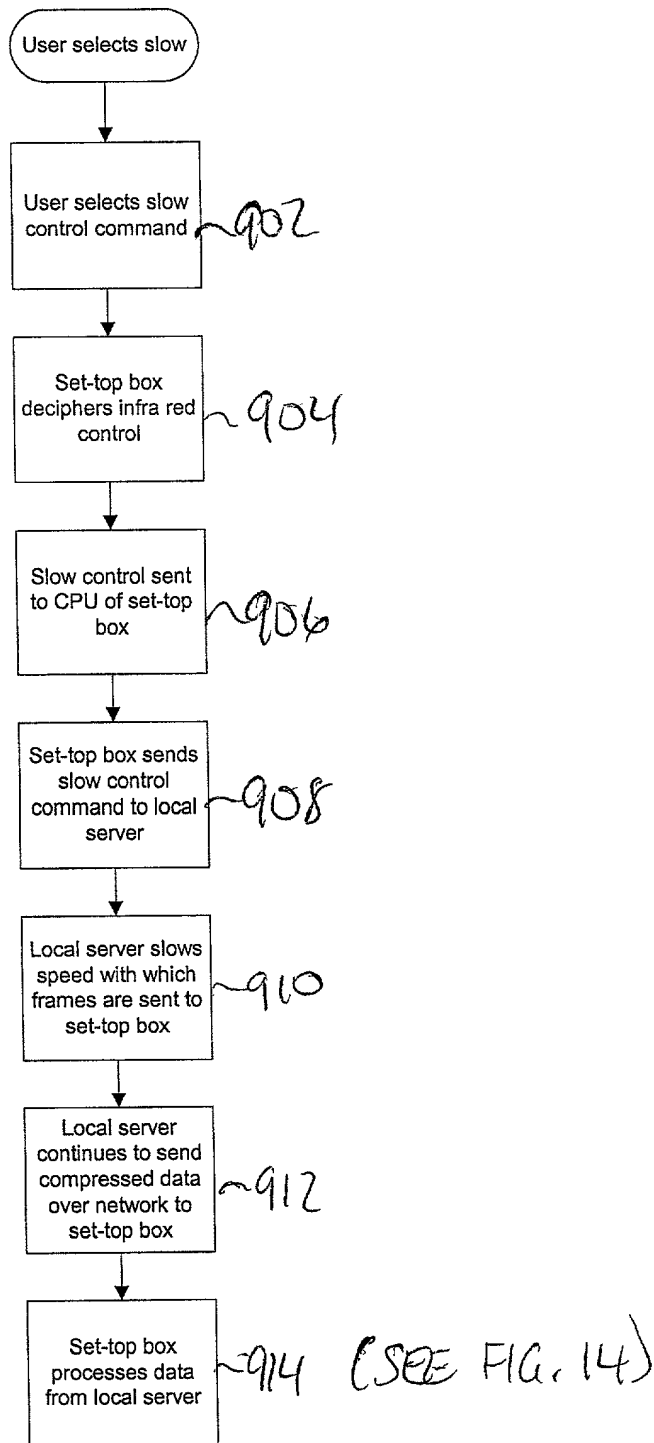


FIG. 9

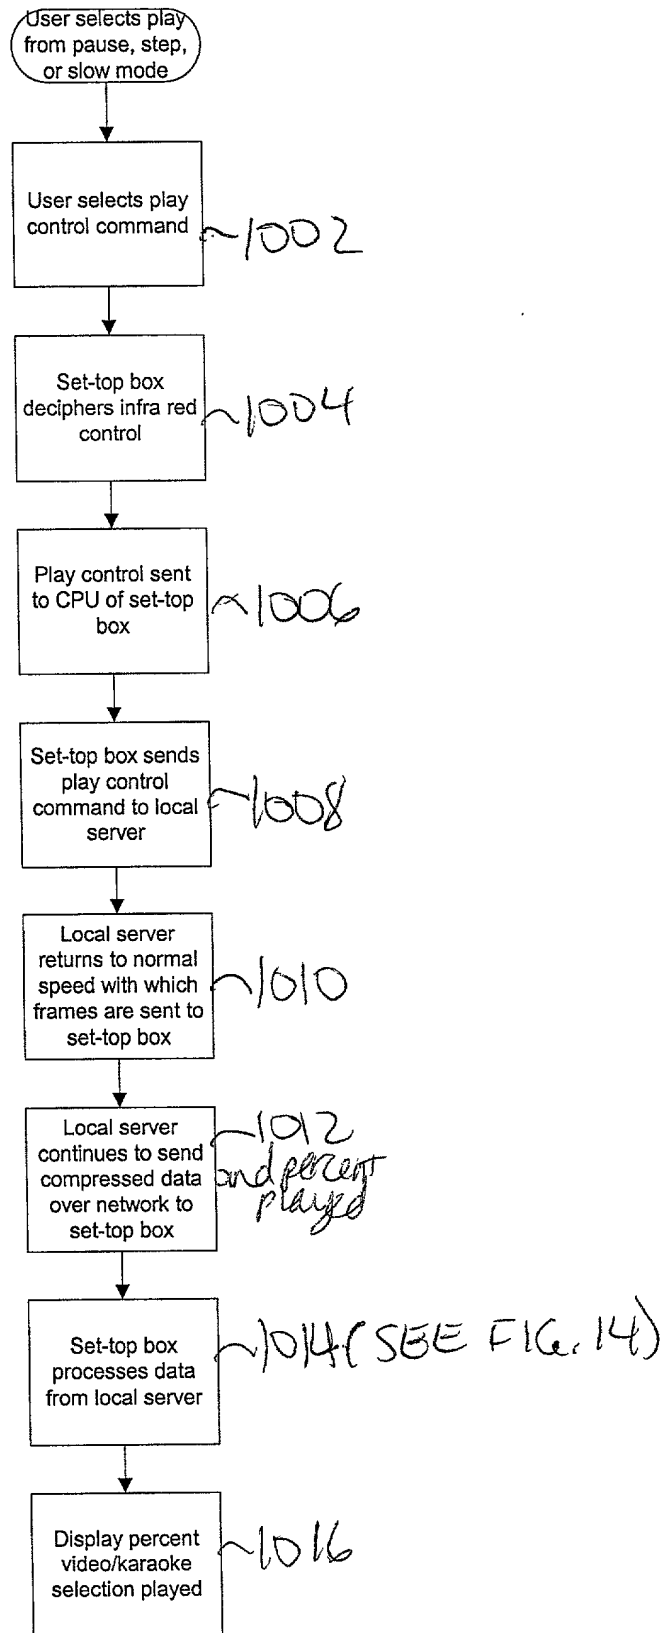


FIG. 10

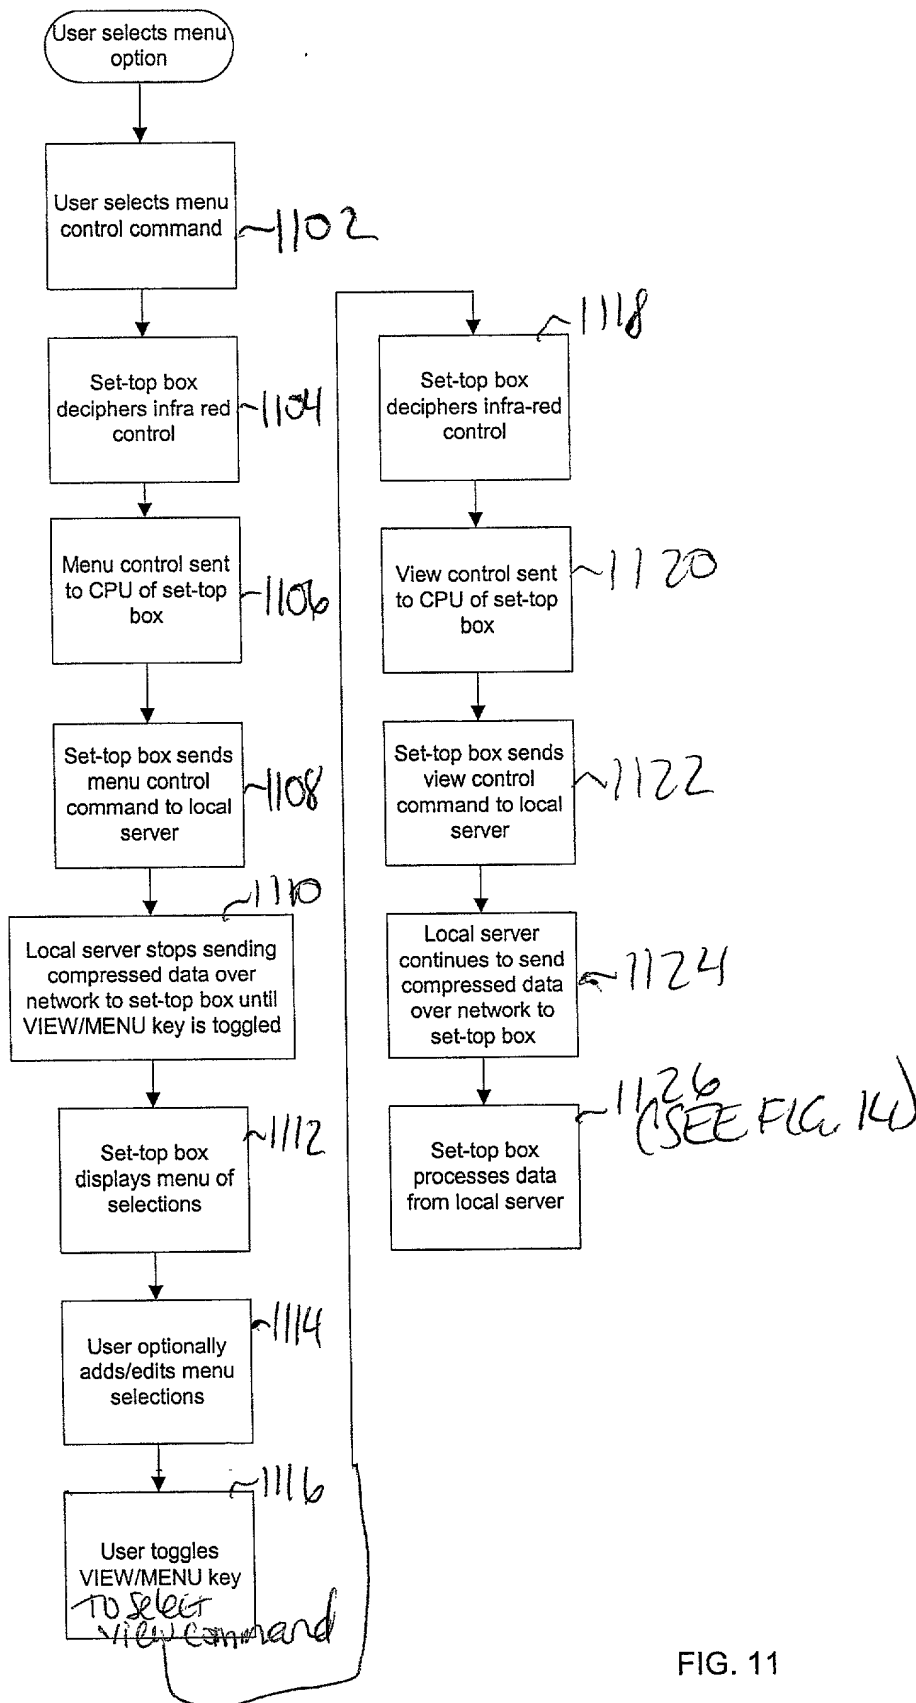
[illegible]

FIG. 11

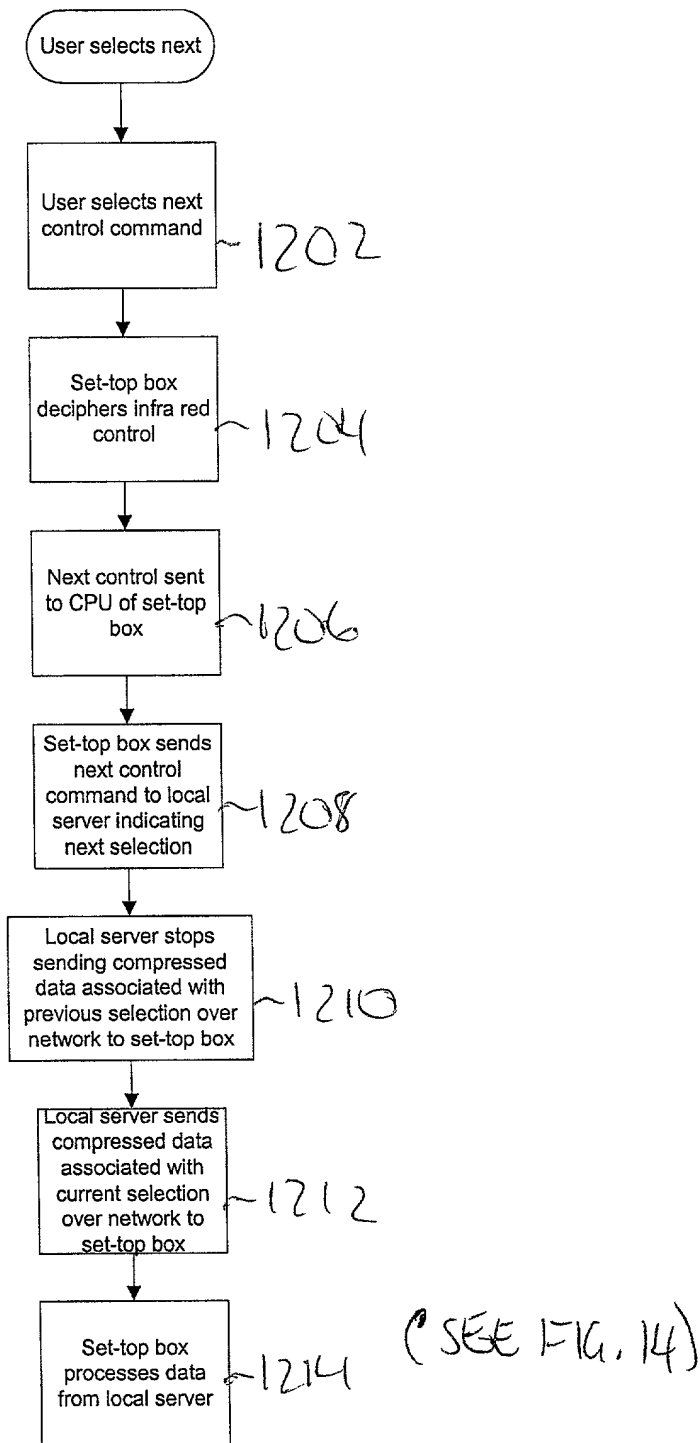


FIG. 12


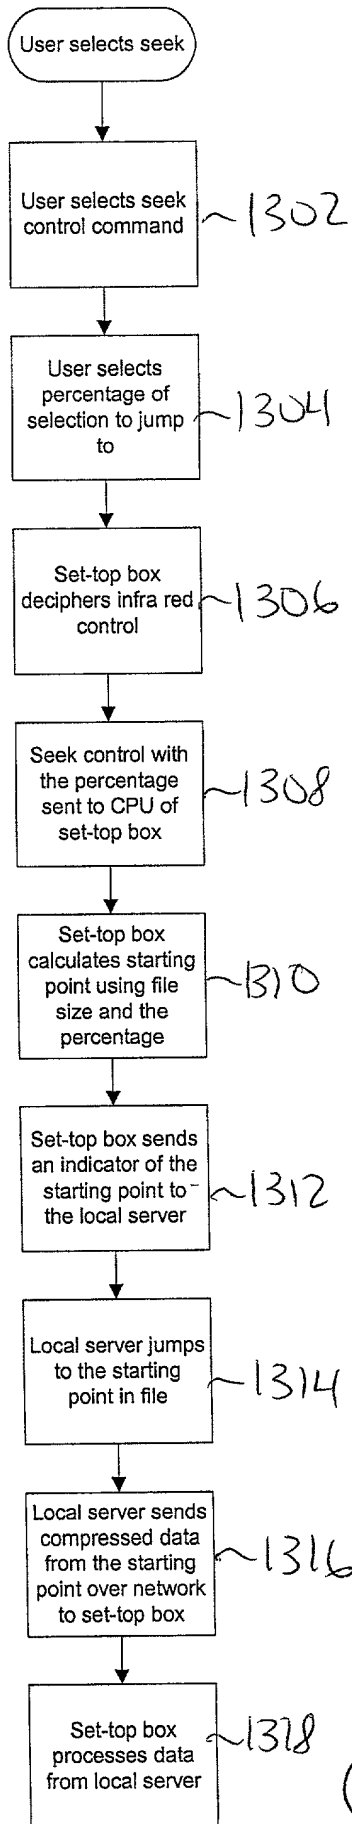


FIG. 13
(SEE FIG. 14)

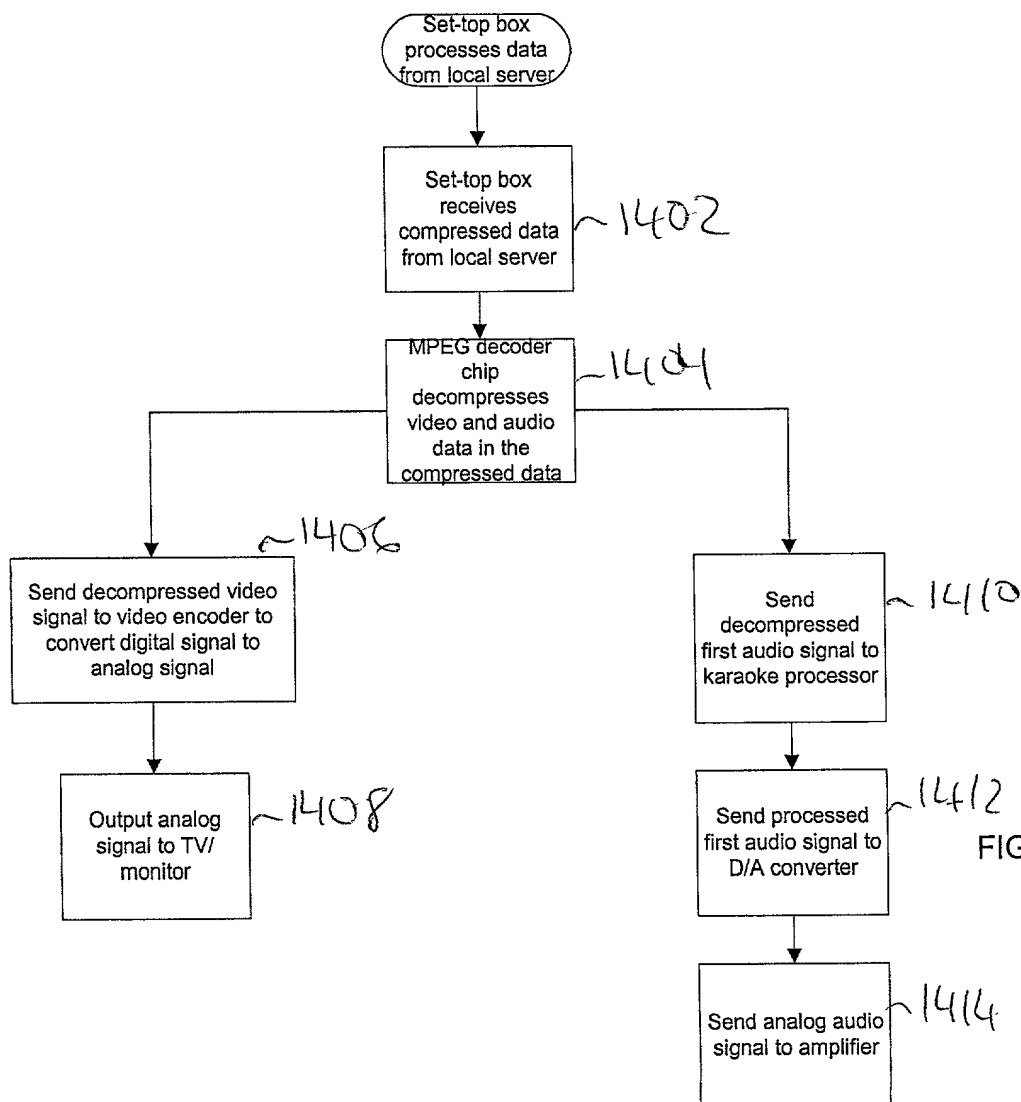

DECLARATION AND POWER OF ATTORNEY FOR ORIGINAL U.S. PATENT APPLICATION

Attorney's Docket No. NEV1P002

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **INTERACTIVE DATA TRANSMISSION SYSTEM HAVING STAGED SERVERS** the specification of which,

(check one)

1. ☒ is attached hereto.

2. ☐ was filed on _____ as
U.S. Application No. _____
and was amended on _____.

3. ☐ was filed on _____ as
International PCT Application No. _____
and was amended on _____.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, CFR § 1.56.

Prior Foreign Application(s)

I hereby claim foreign priority benefits under Title 35, United States code, § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed:

			Priority Benefits Claimed?
			Yes ___ No ___
_____	_____	_____	
(Application No.)	(Country)	(Filing Date)	
_____	_____	_____	Yes ___ No ___
(Application No.)	(Country)	(Filing Date)	

Provisional Application(s)

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below:

60/216,797	July 7, 2000
(Application No.)	(Filing Date)
_____	_____
(Application No.)	(Filing Date)

Prior U.S. Application(s)

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

_____ (Application No.)	_____ (Filing Date)	_____ (Status - patented, pending, abandoned)
----------------------------	------------------------	--

_____ (Application No.)	_____ (Filing Date)	_____ (Status - patented, pending, abandoned)
----------------------------	------------------------	--

Power of Attorney

And I hereby appoint the law firm of **Beyer Weaver & Thomas, LLP** and all practitioners who are associated with the Customer Number 022434 as my principal attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Direct Correspondence To:

Customer Number: 022434
BEYER WEAVER & THOMAS, LLP
P.O. Box 778
Berkeley, CA 94704-0778



Direct Telephone Calls To:

Attorney Name at telephone number (510) 843-6200

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Typewritten Full Name of

Sole or First Inventor: Hensen Mou

Citizenship: United States of America

Inventor's signature: 

Date of Signature: 10/12/00

Residence: (City) San Jose

(State/Country) California

Post Office Address: 1858 St. Andrews Place, San Jose, California 95132